U0060

PATIENT HANDLING LIFT

FUNCTIONS







GENERAL SPECIFICATIONS

- It may be easily used in narrow spaces due to adjustable foot system.
- Lifting functions may be easily performed due to the engine system which is controlled by remote contol.
- In case of any malfunction, the height movement may be operated manually.
- Long lasting battery system and led system indicating the status of the battery
- It provides continuous use due to the back up battery and charging unit.
- Its safe bearing capacity is 220 kg.
- XS, S, M, L, XL lifting apparatus (SILING) options are available.
- There is a lifting stretcher for lifting the patient horizontally.
- There are impact wheels that are resistant against impacts.
- It may be easily moved to the desired direction due to wheels with 100 mm diameter.
- Metal components painted with electrostatic paint after being coated with phosphate against corrosion .

OPTIONS

GROUP 1 / SLING OPTIONS




GROUP 2 / WALKING JACKET OPTIONS



GROUP 3 / STRETCHER OPTIONS



GROUP 4 / HANDLING APPARATUS OPTIONS

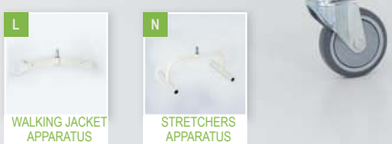

Do not select the others if you select without accessory.
If you select the others you can select all or 1-2-3 ... of them.

Must select minumum one. Can select 1-2-3 ... both.

